

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

PCT/SE 0 3 / 0 1 5 4 4 #2

REC'D 20 OCT 2003

WIPO

PCT

## Intyg Certificate

*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*



(71) Sökande NordNav Technologies AB, Luleå SE  
Applicant (s)

(21) Patentansökningsnummer 0203047-6  
Patent application number

(86) Ingivningsdatum 2002-10-15  
Date of filing

Stockholm, 2003-10-08

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Gunilla Larsson

Avgift  
Fee

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

jw/

Ref.: 55600 SE

Applicant: NordNav Technologies AB**Spread Spectrum Signal Processing****5 THE BACKGROUND OF THE INVENTION AND PRIOR ART**

The present invention relates generally to processing of spread spectrum signals by means of vector based algorithms. More particularly the invention relates to a method of receiving spread spectrum signals according to the preamble of claim 1 and a signal receiver according to the preamble of claim 28. The invention also relates to a computer program according to claim 26 and a computer readable medium according to claim 27.

Spread spectrum technology is becoming increasingly important in many areas, of which cellular communication systems and global navigation satellite systems (GNSS) represent two important examples. Moreover, the large variety of transmission standards creates a demand for hybrid- or general-purpose receivers. For instance, both the cellular standards cdma2000 and WCDMA involve transmission of spread spectrum signals. However, due to differences in the air interfaces one and the same terminal cannot be used in the two systems. Instead, a dedicated terminal must be employed in each system. Alternatively, a dual mode terminal must be designed, which includes two separate transceiver chains. Correspondingly, a navigation receiver adapted for one GNSS, say the Global Positioning System (GPS; U.S. Government), is not able to receive signals from a satellite that belongs to a different GNSS, such as the Galileo system (the European programme for global navigation services) or the Global Orbiting Navigation Satellite System (GLONASS; Russian Federation Ministry of Defense).

In order to make this possible, a multi-mode receiver must be designed. However, including multiple receiver chains in a single device is not only expensive, it also renders the unit bulky and heavy, particularly if more than two signal formats are to be processed. Therefore, a programmable software receiver solution is desired whose signal processing principles may be altered according to which signals that shall be received and processed.

Various software solutions are already known for processing GNSS signals. The patent document WO02/50561 is one example in which a GPS receiver tracking system for guiding missiles is described. The receiving station here includes one or more processing stages for receiving and processing GPS data. A control signal controls whether a quantity of processing stages should be increased or decreased in response to the result of a correlation operation. The tracking and recovery of timing information is entirely performed in software. However, the processing involves real-time calculation of relatively complex Fourier transforms, and therefore requires considerable processing resources. Thus, a receiver of this type is not particularly suitable for small sized units, such cellular phones or portable GNSS-receivers.

The article "TUPM 12.4: Software Solution of GPS Baseband Processing", ULSI Laboratory, Mitsubishi Electric Corporation, IEEE, 1998 by Asai T., et al. outlines the principles for a software GPS receiver using an embedded microprocessor, which enables signals from up to eight satellites to be demodulated at around 40 MIPS (millions of / or Mega Instructions Per Second). A 2 MHz GPS baseband signal is here fed to the software radio receiver, which performs spectrum despread and mixing; synchronous demodulation, satellite acquisition and tracking; as well as phase compensation. An algorithm is proposed through which the intermediate frequency (IF) signal is 1-bit sampled and where downconversion is performed before despread. Resulting data in the form of 32 samples are continuously

- processed in parallel. A DRAM (Dynamic Random Access Memory) stores a particular C/A (Coarse Acquisition) code table for each satellite from which signals are received. All other data and instructions are stored in a cache memory in order to
- 5 accomplish a high-speed processing. Although this strategy is declared to result in a reasonably efficient implementation, the document lacks a specific description as to how the despreading and the correlation should be effected in order to, in fact, obtain this effect.
- 10 Akos. D. et al., "Tuning In to GPS – Real-Time Software Radio Architectures for GPS Receivers", GPS World, July 2001 describes a receiver architecture through which IF signal samples are fed directly from a radio front-end to a program-
- 15 mable processor for continued processing. The article mentions the possibility of using single instruction multiple data (SIMD) instructions to process multiple data samples in parallel. However, portability- and flexibility problems are recognized, and again, there is no teaching as to how an efficient parallel processing could actually be accomplished.
- 20 Dosis, F. et al., "Design and Test-Bed Implementation of a Reconfigurable Receiver for Navigation Applications", Electronics Department, Politecnico di Torino, Navigation Signal Analysis and Simulation Group, Spring of 2002 relates to the design of a reconfigurable GNSS receiver which is capable of fusing
- 25 data from two or more different GNSS:s. The document sketches an architecture which, in addition to a radio front-end, includes a Field Programmable Gate Array (FPGA) and a Digital Signal Processor (DSP). The authors address various computational load issues. However, they do not present an algorithm which
- 30 fulfills the identified requirements.

Hence, the prior art includes a number of examples of software-based GNSS-receivers. Nevertheless, there is yet no distinct teaching of a highly efficient solution which is suitable for implementation in software and has capabilities that are at least in par

with those of today's ASIC-based solutions for receiving and processing spread spectrum signals in real-time (ASIC = Application Specific Integrated Circuit).

#### SUMMARY OF THE INVENTION

- 5 The object of the present invention is therefore to provide a solution for receiving and processing spread spectrum signals, which solves the problems above and thus to present a truly software adapted strategy that may be implemented in a physically small and power efficient device.
- 10 According to one aspect of the invention the object is achieved by a method of receiving spread spectrum signals as initially described, which is characterized by comprising a preparation for the correlation step, wherein the preparation takes place before the receiving the continuous signal. This preparation
- 15 involves pre-generating a multitude of code vectors, which each represents a particular code sequence of the at least one signal source specific code sequence. Moreover, according to the invention, the correlation step involves multiplying at least each vector in a sub-group of the code vectors with at least one
- 20 vector, which is derived from the data word.

- This strategy is advantageous because the proposed vector approach makes it possible for a digital processor (e.g. a micro-processor) to process multiple signal samples in parallel during each clock cycle and thus make very efficient use of the
- 25 processor. Furthermore, by pre-generating the code vectors valuable processing capacity is saved, which in turn renders it possible to deal with a sufficient amount of input data per time unit in order to, for example track navigation signals that are transmitted by the satellites in a navigation satellite system.
- 30 According to a preferred embodiment of this aspect of the invention, each code vector represents a particular signal source specific code sequence, which is sampled at the basic

sampling rate and quantised with the quantising process that is used to produce the level-discrete sample values. Preferably, the code vectors are also further adapted to the format of the incoming data signal in a way which renders the following processing efficient.

According to another preferred embodiment of this aspect of the invention, the at least one signal source specific code sequence represents so-called pseudo random noise. This type of code sequences is beneficial in environments where two or more different signals are modulated onto the same carrier frequency. Namely, the different pseudo random noise signals are orthogonal (or at least almost orthogonal) to each other. Consequently, a first information signal spread by means of a first pseudo random noise signal causes a minimal deterioration of a second information signal which is spread by means of a second pseudo random noise signal, and vice versa.

According to another preferred embodiment of this aspect of the invention, the receiving step involves down conversion of an incoming high-frequency signal to an intermediate frequency signal. The high-frequency signal is presumed to have a spectrum which is symmetric around a first frequency and the intermediate frequency signal is presumed to have a spectrum which is symmetric around a second frequency, which is considerably lower than the first frequency. Hence, the receiving step transforms the information carrying signal to a baseband which is technically more easy to handle than the band at which the original incoming signal is located.

According to another preferred embodiment of this aspect of the invention, the method includes the following steps. First, a maximum frequency variation of the second frequency due to Doppler-effects is determined. Then, a Doppler frequency interval around the second frequency is defined. The Doppler frequency interval has a lowest frequency limit equal to the difference between the second frequency and the maximum frequency

variation, and a highest frequency limit equal to the sum of the second frequency and the maximum frequency variation. After that, the Doppler frequency interval is divided into an integer number of equidistant frequency steps, and subsequently a frequency candidate vector is defined for each frequency step. This way of dividing the spectrum is advantageous because it provides a flexible modeling of the intermediate carrier frequency and its variations.

According to another preferred embodiment of this aspect of the invention, an integer number of initial phase positions is determined for the intermediate frequency signal. The integer number thus represents a phase resolution, such that a relatively high number corresponds to a comparatively high phase resolution, whereas a relatively low number corresponds to a comparatively low phase resolution. Furthermore, a carrier frequency-phase candidate vector is defined for each combination of carrier frequency candidate vector and initial phase position. The different frequency-phase candidate vectors are beneficial, since they allow the determination of a very accurate estimate of frequency- and phase characteristics of a received signal, which in turn vouches for a demodulated signal having a high quality.

According to yet another preferred embodiment of this aspect of the invention, the number of elements in each carrier frequency-phase candidate vector is determined. Subsequently, the carrier frequency-phase candidate vectors are stored according to a data format, which is adapted to performing correlation operations between the at least one vector derived from the data word and a segment of a carrier frequency-phase candidate vector. This adaptation is advantageous because thereby several signal samples may be processed in parallel by means of comparatively simple operators. Preferably, the adapting of the data format involves adding at least one element to each segment of the carrier frequency-phase candidate vector, such that the segment attains a number of elements which is equal to

the number of elements in each of the at least one vector that is derived from the data word. Hence, it is namely possible to process a segment of the carrier frequency-phase candidate vector together with one of the at least one vector by either a  
5 so-called Single Instruction Multiple Data (SIMD)-operation or a logical XOR-operation.

According to still another preferred embodiment of this aspect of the invention, the method also includes the following steps. First, a maximum variation of the code rate due to Doppler-effects is determined. Then, a Doppler rate interval is defined  
10 around a center code rate. The Doppler frequency interval has a lowest code rate limit equal to the difference between the center code rate and the maximum code rate variation, and a highest frequency limit equal to the sum of the center code rate and the  
15 maximum code rate variation. In analogy with the intermediate frequency spectrum, the Doppler rate interval is divided into an integer number of equidistant code rate steps, and a code rate candidate is defined for each code rate step. In further analogy with the intermediate frequency, an integer number of possible  
20 initial code phase positions is determined for each code rate candidate. The integer number thus represents a code phase resolution, such that a relatively high number corresponds to a comparatively high code phase resolution, whereas a relatively low number corresponds to a comparatively low code phase  
25 resolution. Typically, the spread spectrum code modulation is less sensitive to distortion caused by Doppler effects than the frequency modulation. Therefore, the code rate steps may be relatively large. However, a certain degree of Doppler shift estimation is desirable to attain a demodulated signal of high quality.

30 According to yet another preferred embodiment of this aspect of the invention, a set of code vectors is generated for each signal source specific code sequence by sampling each code rate-phase candidate vector with the basic sampling rate, and thus produce a corresponding code vector. Again, this simplifies a  
35 parallel processing of several signal samples by means of



comparatively simple operators.

According to still another preferred embodiment of this aspect of the invention, a modified code vector is generated on basis of each code vector by: copying a particular number of elements from the end of an original code vector to the beginning of the modified code vector, and copying the particular number of elements from the beginning of the original code vector to the end of the code vector. This extension of the code vector is highly advantageous because it allows extraction of tracking parameters through early-, prompt- and late techniques by performing a simple translation of local copies of the signal source specific code sequence.

According to still another preferred embodiment of this aspect of the invention, a set of modified code vectors is stored for each signal source specific code sequence. Each modified code vector here contains a number of elements, which represent a sampled version of at least one full code sequence. As mentioned above, the modified code vector also includes a repetition of the beginning and the end of the sequence. A particular modified code vector is defined for each combination of code rate candidate and code phase position. These pre-generated modified code vectors save considerable processing capacity in the processor, since they need not be calculated in real time, but may simply be acquired from a memory.

According to yet another preferred embodiment of this aspect of the invention, the data format of the modified code vectors is adapted with respect to the data format of the at least one vector that has been derived from the data word, such that a modified code vector and one of the at least one vector may be processed jointly by a SIMD-operation or an XOR-operation. Naturally, this is advantageous from a processing efficiency point-of-view.

According to yet another preferred embodiment of this aspect of

the invention, the method involves an initial acquisition phase and a subsequent tracking phase. The acquisition phase establishes a set of preliminary parameters which are required for initiating a decoding of signals that are received during the tracking phase. The parameters may include: a modified code vector, a carrier frequency candidate vector an initial phase position, a code phase position and code index, which denotes a starting sample value for the modified code vector. A successful acquisition phase thus results in that at least one signal source specific code sequence is identified and that this signal is possible to track by the receiver (i.e. may be continued to be received).

According to still another preferred embodiment of this aspect of the invention, the tracking in turn, involves the following steps. First, based the tracking characteristics, a prompt pointer is calculated for each modified code vector. The prompt pointer indicates a start position for the code sequence. The initial prompt pointer value is set equal to the code index. Then, at least one pair of early- and late pointers is assigned around each prompt pointer. The early pointer specifies a sample value which is positioned at least one element before the prompt pointer's position, and correspondingly, the late pointer specifies a sample value being positioned at least one element after the prompt pointer's position. These pointers are used to maintain the tracking of the received signal by a repeated repositioning of the pointers around a correlation maximum value, such that the prompt pointer is positioned as close as possible to this value, the early pointer is positioned in time somewhat prior to this value and the late pointer is positioned in time somewhat after this value. An important advantage attained by this strategy is that one and the same vector may be re-used in order to represent different delays. Thus, valuable memory space and processing capacity is saved.

According to still another preferred embodiment of this aspect of the invention, the tracking involves the following further steps.

First, a sequence of incoming level-discrete sample values is received. Then, data words are formed from the sample values, such that each data word contains a number of elements which is equal to the number of elements in each carrier frequency-phase candidate vector. After that, a relevant set of carrier frequency-phase candidate vectors is calculated for the data word, and a pre-generated in-phase representation respective a quadrature-phase representation of the vector is acquired for each carrier frequency-phase candidate vector in the relevant set. Subsequently, each data word is on one hand multiplied with a in-phase representation of the carrier frequency-phase candidate vector in the relevant set to produce a first intermediate-frequency-reduced information word, and on the other hand multiplied with a quadrature-phase representation of the carrier frequency-phase candidate vector in the relevant set to produce a second intermediate-frequency-reduced information word. The intermediate-frequency-reduced information words thus constitute a respective component of the vectors mentioned above that have been derived from the incoming data words. This multiplied strategy is advantageous because it enables a very efficient usage of the capacity of a general-purpose microprocessor.

According to yet another preferred embodiment of this aspect of the invention, XOR- or SIMD-operations are used to perform the multiplication between the data word and the in-phase representation of the carrier frequency-phase candidate vector respective between the data word and the a quadrature-phase representation of the carrier frequency-phase candidate vector.

According to another preferred embodiment of this aspect of the invention, the tracking involves the further steps of: correlating the first intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the prompt pointer to produce a first prompt-despread symbol string, correlating the first intermediate-frequency-reduced information word with a modified code vector starting at a position indicated

by the early pointer to produce a first early-despread symbol string, correlating the first intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the late pointer to produce a first late-despread symbol string, correlating the second intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the prompt pointer to produce a second prompt-despread symbol string, correlating the second intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the early pointer to produce a second early-despread symbol string, and correlating the second intermediate-frequency-reduced information word with a modified code vector starting at a position indicated by the late pointer to produce a second late-despread symbol string. Preferably, a resulting data word is then derived for each set of the despread symbol strings. This may, for example be performed either by performing the relevant adding operation, or by looking up a pre-generated value in a table based on the bit pattern of the despread symbol strings depending on whether the resulting data words contain packed or unpacked information. Data of high quality may thus be obtained with a minimum of real time calculations, which is advantageous from a processing point-of-view.

According to yet another preferred embodiment of this aspect of the invention, either XOR- or SIMD-operations are used also to perform the multiplication between the intermediate-frequency-reduced information words and the modified code vectors, since again, this is advantageous from a processing point-of-view.

According to another preferred embodiment of this aspect of the invention, certain pieces of information are propagated in connection with completing the processing of a current data word and initiating the processing of a subsequent data word. Preferably, this propagated information includes: a pointer which indicates a first sample value of the following data word, a group of parameters that describe the relevant set of carrier

frequency-phase candidate vectors, the relevant set of code vectors, and the prompt-, early-, and late pointers. Hence, based on the propagated information, the subsequent data word may be processed immediately.

5 According to a further aspect of the invention the object is achieved by a computer program directly loadable into the internal memory of a computer, comprising software for performing the above proposed method when said program is run on a computer.

10 According to another aspect of the invention the object is achieved by a computer readable medium, having a program recorded thereon, where the program is to make a computer perform the above proposed method.

15 According to another aspect of the invention the object is achieved by the signal receiver as initially described, which is characterized in that the proposed computer program is loaded into the memory means, such that the receiver will operate according to the above-described method.

20 Consequently, the invention offers an excellent instrument for receiving and decoding any type of spread spectrum signals in a general software radio receiver. For instance, one and the same receiver may be used to track navigation satellite signals of different formats. These signals may even be received in parallel, such that a first signal is received on a first format  
25 while one or more other signals are received on a second or third format.

Moreover, the proposed solution permits one and the same receiver to be utilized for completely different purposes, such as communication in a cellular system.

### 30 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is now to be explained more closely by

means of preferred embodiments, which are disclosed as examples, and with reference to the attached drawings.

- 5      Figure 1      shows a spectrum graph over an exemplary spread spectrum signal from which information may be extracted according to the invention,
- Figure 2      shows a spectrum graph over a frequency down-converted signal corresponding to the spectrum shown in figure 1,
- 10      Figure 3      is an enlarged version of figure 2 in which a Doppler shifting of the spectrum is illustrated,
- Figure 4      illustrates how a data signal is modulated onto a signal source specific code sequence according to an embodiment of the invention,
- 15      Figure 5      depicts a three-dimensional graph over carrier frequency-phase candidate vectors to be used as initial correlators according to an embodiment of the invention,
- Figure 6      shows an alternative representation the carrier frequency-phase candidate vectors in figure 5,
- 20      Figures 7-8      show graphs which illustrate how a code index and a code phase are defined for a received signal according to an embodiment of the invention,
- 25      Figures 9a,b      illustrate how a modified code vector is generated based on an original code vector according to an embodiment of the invention,
- Figure 10      depicts a three-dimensional graph over code rate-phase candidate vectors to be used as subsequent correlators according to an embodiment of the invention,
- 30      Figure 11      illustrates how a set of code sequence start pointers is assigned to a modified code vector according to an embodiment of the invention,

- Figure 12 illustrates how data words are formed from a sequence of incoming level-discrete sample values according to an embodiment of the invention,
- 5 Figure 13 illustrates how the data words of figure 12 are correlated with various pre-generated vectors according to an embodiment of the invention,
- Figure 14 illustrates how multiple pairs of pointers may be assigned according to an embodiment of the invention,
- 10 Figure 15 shows a proposed signal receiver, and
- Figure 16 illustrates, by means of a flow diagram, the general method of processing spread spectrum signals according to the invention.

## 15 DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

In order to realize a truly software based signal processing solution in real-time at high sampling rates, such as those required in a GNSS, the architecture of the microprocessor system must be utilized very efficiently. The present invention  
20 uses an approach, which involves a form of parallel processing based on pre-generated code vector representations. The invention thereby strikes a balance between processing speed and memory usage, which compensates for the capacity deficit of a general purpose microprocessor in relation to an ASIC. The  
25 details of this solution will become apparent from the below disclosure.

Figure 1 shows a spectrum graph over an exemplary spread spectrum signal from which information may be extracted according to the invention. For example, the signal may be a  
30 GPS C/A-signal in the L1-band with a carrier frequency  $f_{HF}$  of 1,57542 GHz. This means that the signal's spectrum is

symmetrical around the carrier frequency  $f_{HF}$ . Moreover, the signal has at least 98% of its energy distributed within a 2 MHz wide frequency band  $BW_{HF}$  around the carrier frequency  $f_{HF}$ . Therefore, it is generally sufficient if the spread spectrum signal  
5 is downconverted to an intermediate frequency  $f_{IF}$  at around 1 MHz in order to enable further signal processing at a lower frequency.

Figure 2 shows a spectrum graph over such a frequency down-converted signal, whose spectrum is symmetrical around an  
10 intermediate frequency  $f_{IF}$ , which is considerably lower than the carrier frequency  $f_{HF}$ , for example  $f_{IF} = 1,25$  MHz. Due to movements of the transmitter (i.e. typically a satellite in orbit) and the receiver (i.e. typically a mobile GNSS-receiver) a Doppler shift may occur in the received signal, which is proportional to the  
15 relative velocity between the transmitter and the receiver. A maximum Doppler shift  $f_D$  is defined which in the GNSS case normally is approximately 10 kHz. Thus, the entire spectrum may be shifted within an interval  $2f_D$ , such that the center frequency falls any where between  $f_{IF}+f_D$  (corresponding to a  
20 maximum positive Doppler shift) and  $f_{IF}-f_D$  (corresponding to a maximum negative Doppler shift). For illustrative purposes the interval  $2f_D$ , has been severely exaggerated in the figure 2. The figure also indicates a phase variation interval  $\phi_D$  (along an independent axis  $\phi$ ) around the intermediate frequency  $f_{IF}$ . The  
25 phase variation interval  $\phi_D$  demonstrates the fact that the phase position of the received signal is initially unknown to the receiver, and thus constitutes a calibration parameter. The effects of this parameter will be further elucidated below with reference to figure 5.

30 An enlarged version of the spectrum in figure 2 is shown in figure 3. The intermediate spectrum may, due to possible Doppler effects, be shifted such that its center frequency lies in the interval  $2f_D$  from  $f_{IF-min}=f_{IF}-f_D$  to  $f_{IF-max}=f_{IF}+f_D$ . The potential maximum shifted spectra are here indicated with a respective  
35 dashed line. The diagram in figure 3 also shows a Nyquist



frequency  $r_s/2$  corresponding to a minimal sampling rate  $r_s$  which, when used for sampling the intermediate frequency signal, will result in a non-aliased discrete spectrum. Provided that  $f_D = 10$  kHz,  $f_{IF} = 1,25$  MHz,  $BW_{HF} = 2$  MHz and the intermediate frequency signal is lowpass filtered through an analog filter having a 2,5 MHz wide passband, the minimal sampling rate  $r_s$  becomes 5 MHz (i.e. two times the highest frequency component after the analog filter).

Figure 4 illustrates schematically how a data signal D is modulated onto a signal source specific code sequence CS on the transmitter side according to an embodiment of the invention. According to a preferred embodiment of the invention, the signal source specific code sequence CS constitutes so-called pseudo random noise. The data signal D here contains a data symbol sequence  $[+1, -1, -1, +1, -1]$ , and has a relatively low symbol rate, say 50 Hz. The signal source specific code sequence CS, however, has a relatively high symbol rate (or more correctly chipping rate). For instance, a signal source specific code sequence CS in the form of a GPS C/A code may have a chipping rate of 1,023 MHz and contain 1023 chips per period. Each chip,  $ch$ , is either  $+1$  or  $-1$ . Hence, the C/A code repeats itself one per ms. The data signal D is modulated onto (or spread by) the signal source specific code sequence CS by multiplying each data symbol with the code sequence CS. The data symbol  $+1$  thereby results in an unaltered code sequence CS, whereas the data symbol  $-1$  results in an inverted code sequence CS.

If a data signal D having a rate of 50 Hz is spread by means of a signal source specific code sequence CS having a chipping rate of 1,023 MHz, this results in 20 entire code sequences CS per data symbol. Namely, the period time for one data symbol is 20 ms, whereas the period time for the code sequence is only 1 ms.

Figure 5 depicts a three-dimensional graph over different carrier frequency-phase candidate vectors, which may be used as initial

correlators according to an embodiment of the invention. As mentioned above, the intermediate frequency spectrum may be Doppler shifted. Therefore, the particular frequency of the received signal is initially unknown within a Doppler frequency interval from  $f_{IF-min}$  to  $f_{IF-max}$ . Moreover, the phase position of the received signal is beforehand unknown to the receiver. In order to enable an estimation of the actual intermediate carrier frequency, the Doppler frequency interval  $f_{IF-min} - f_{IF-max}$  is divided into an integer number of equidistant frequency steps. Of course, the larger the number of steps is, the more accurately the intermediate carrier frequency may be estimated. In this example, a step size  $\Delta f$  of 20 Hz is chosen. In some applications, however, a much larger step size  $\Delta f$  may provide a sufficient frequency accuracy, whereas in other applications (where relatively high accuracy is needed) a considerably smaller step size  $\Delta f$  may be required. In any case, a Doppler frequency interval  $f_{IF-min} - f_{IF-max}$  of 20 kHz and a step size  $\Delta f$  of 20 Hz requires 1000 steps, where a first step includes the frequencies from  $f_{IF-min}$  to  $f_{IF-min} + \Delta f$ , a second step includes the frequencies from  $f_{IF-min} + \Delta f$  to  $f_{IF-min} + 2\Delta f$ , and so on up to a last step including the frequencies from  $f_{IF-min} + 999\Delta f$  to  $f_{IF-max}$ .

A frequency candidate vector  $f_{IF-C}$  is defined for each frequency step. In order to estimate an initial phase position of the intermediate carrier frequency, an integer number of initial phase positions  $\Phi_0, \dots, \Phi_7$  are determined. The illustrated example shows eight such positions  $\Phi_C$ . This gives a phase resolution of  $\pi/4$ . For each frequency candidate vector  $f_{IF-C}$ , eight different phase positions  $\Phi_0, \dots, \Phi_7$  are thus defined which each represents a particular phase shift from 0 to  $7\pi/4$ . A combination of a certain carrier frequency candidate vector  $f_{IF-C}$  and a particular initial phase position  $\Phi_C$  is referred to as a carrier frequency-phase candidate vector. Figure 5 shows all such vectors (i.e. eight) for the first step, where  $f_{IF-C} = f_{IF-min}$ , and the second step, where  $f_{IF-C} = f_{IF-min} + \Delta f$ .

Additionally, figure 5 includes an axis  $L_C$  along which the

number of sample values (or length) of the frequency candidate vector  $f_{IF-C}$  is indicated. The  $L_C$  number is preferably a power of 2 because this generally renders the implementation more simple. The number of sample values in each frequency candidate vector  $f_{IF-C}$  is set in consideration of the available memory space, the desired frequency resolution and the desired phase resolution. If, in the example above, a length of 512 samples is chosen and each sample requires one byte, the total (uncompressed) memory demand would be 3,9 MB (i.e. 1000 frequencies  $\times$  8 phase positions  $\times$  512 B = 4096000 B = 3,9 MB).

Figure 6 shows an alternative representation the carrier frequency-phase candidate vectors  $V_{f\phi}(f_{IF-C}, \phi_C)$  in figure 5. Here, the vectors  $V_{f\phi}(f_{IF-C}, \phi_C)$  range from the carrier frequency  $f_{IF-C}=f_{IF-min}$  (say 1,24 MHz) to  $f_{IF-C}=f_{IF-max}$  (say 1,26 MHz), from the phase shift position  $\phi_C=\phi_0$  (say 0) to  $\phi_C=\phi_7$  (say  $7\pi/4$ ), all have a length  $L_C$  of  $s_n$  samples (say 512) and are represented in a cube. Hence, a particular frequency-phase candidate vector  $V_{f\phi}(f_{IF-C}, \phi_C)$  is given by a cuboid segment in the cube which is parallel with the  $L_C$ -axis, and ranges from  $L_C=s_1$  to  $L_C=s_n$ .

After having generated all the carrier frequency-phase candidate vectors  $V_{f\phi}(f_{IF-C}, \phi_C)$ , the vectors are stored in a digital memory with a comparatively short access time, such that they may be readily accessed during a later acquisition and/or tracking phase. Preferably, the carrier frequency-phase candidate vectors  $V_{f\phi}(f_{IF-C}, \phi_C)$  are stored according to a data format which is adapted to performing correlation operations between a vector that has been derived from incoming data words (representing one or more received signals) and a segment of a carrier frequency-phase candidate vector  $V_{f\phi}(f_{IF-C}, \phi_C)$ . The vectors may either include packed samples or they may contain samples that are unpacked to a smallest manageable unit in the micro-processor, such as a byte. Further details regarding the data format issues will be discussed below.

Figure 7 shows a graph over an exemplary code sequence CS,

which has been received, downconverted and sampled according to an embodiment of the invention. After subsequent removal of the intermediate frequency component, the code sequence CS either attains the signal value +1 or -1, and the symbols are altered at a chipping rate of for example 1,023 MHz. At the receiver side, the code sequence CS is sampled with a sampling rate  $r_s$  of for example 5 MHz. The sampling instances are indicated by means of dots on the code sequence signal CS along an axis  $s_1$ . As is apparent from the figure there are approximately four sample values per chip period. Hence, the requirements of the Nyquist theorem are clearly fulfilled. However, the samples are not capable of determining the transition instances with a sufficient accuracy, i.e. where the code sequence signal CS changes from representing one chip symbol to representing another one chip symbol. Therefore, a so-called code phase must be determined. Moreover, a particular sample value at which the code sequence starts must also be established.

Figure 8 shows a graph, which illustrates the sample value at which the code sequence CS starts (the so-called code index CI) and how a code phase, Cph, is defined in relation to this sample value. An initial segment of the code sequence signal CS in figure 7 is therefore represented in figure 8.

A first sample instance is here presumed to occur shortly prior to the actual start of the code sequence CS signal period. Hence, a corresponding sample value  $s_1$  belongs to the end of the preceding period. This is illustrated by means of the line representing the code sequence signal CS being dashed. A subsequent sample instance, however, overlaps the code sequence CS period. The corresponding sample value  $s_2$  is defined as the code index CI. The actual beginning of a code sequence signal is determined in a preceding acquisition phase and typically involves correlation between the received signal and a local copy of the code sequence CS.

The distance between the start of the code sequence signal CS and the code index CI, in turn, is defined as the code phase Cph, and thus represents a measure of the translation (or skew) between the sample instances  $s_i$  and the chip transitions. The  
5 sampling interval between two consecutive sample instances  $s_i$  is divided into an integer number of possible initial code phase positions in order to estimate the code phase Cph. In this example, ten 0.1-steps ranging from 0.0 to 0.9 are defined, where a first step 0.0 would indicate that code sequence signal  
10 CS starts at the code index CI, and a last step 0.9 would indicate that code sequence signal CS starts almost at the preceding sample value  $s_i$ . The figure 8 shows a code phase Cph of 0.4, i.e. a situation where the code sequence signal CS starts approximately in the middle between two consecutive  
15 sample instances  $s_i$ .

In analogy with the carrier frequency-phase candidate vectors  $V_{fp}(f_{IF-C}, \Phi_C)$ , code rate-phase candidate vectors may now be defined for each signal source specific code sequence CS and combination of code rate CR, code index CI and code phase  
20 Cph. Nevertheless, according to a preferred embodiment of the invention, a modified code vector is first produced based on each original code vector.

Figures 9a and 9b illustrate how this may be performed. A code vector CV in figure 9a contains a number of sample values, say  
25 5000. Preferably, the number of sample values is selected in relation to sampling rate such that a full code sequence period is recorded. In the above example, with a sampling rate  $r_s$  of 5 MHz, this means that the 5000 samples cover exactly one full code sequence CS period (which has a duration of 1 ms and contains 1023 chips, since the chipping rate is 1,023 MHz).  
30

A modified code vector  $CV_m$  is now generated on basis of the original code vector CV by copying a particular number of elements  $E_e$  (e.g. two) from the end of the original code vector CV to the beginning of the modified code vector  $CV_m$ .

Correspondingly, a particular number of elements  $E_b$  (e.g. two) from the beginning of the original code vector  $CV$  are copied to the end of the code vector  $CV_m$ , i.e. after the elements  $E_e$ . Figure 9b shows the resulting modified code vector  $CV_m$ . Since, in this example, each chip symbol is sampled at approximately four instances, two sample values are equivalent to about one half chip period. Thereby, the above copying of the elements  $E_e$  and  $E_b$  allows a one-half-chip shifting of the code vector  $CV$  during a correlation operation between the code vector  $CV$  and the received data. This will be discussed further below with reference to figure 11.

Figure 10 depicts a three-dimensional graph over different code rate-phase candidate vectors  $CV_m(CR_{C-C}, Cph)$  which represent a signal source specific code sequence  $CS(i)$ . Analogous to the intermediate carrier frequency, the nominal code rate  $CR_C$  for the code rate candidate vector  $CR_{C-C}$  may also vary due to Doppler effects from a lowest value  $CR_{min}$  to a highest value  $CR_{max}$ . However, since the code rate (or chipping rate) is comparatively high, the rate variation here becomes rather small.

For example, a Doppler shift of 10 kHz at the intermediate carrier frequency is equivalent to a shift in a nominal code rate  $CR_C$  at 1,023 MHz of merely 6,5 Hz. Namely, the Doppler shift in respect of the code rate is generally equal to the ratio between the carrier frequency and the code rate ( $1575,42 \text{ MHz} / 1,023 \text{ MHz} = 1540$ ; a Doppler shift of 10 kHz at the intermediate carrier frequency thus corresponds to  $10000/1540 \approx 6,5 \text{ Hz}$ ). The code rate candidate vector  $CR_{C-C}$  may attain a value anywhere in a Doppler rate interval between  $CR_{min} = 1022993,5 \text{ Hz}$  and  $CR_{max} = 102306,5 \text{ Hz}$ . The Doppler rate interval  $CR_{min} - CR_{max}$  is divided into an integer number of equidistant code rate steps  $\Delta CR$ , say 13. In this example, each interval  $CR_{min}$ ,  $CR_{min} + \Delta CR$ , ...,  $CR_{max}$  thus spans 1 Hz. According to a preferred embodiment of the invention, the code rate step size is adaptive, e.g. determined on basis of the sampling frequency and the desired resolution.

In figure 10, the three-dimensional graph (or cube) contains a set of code rate-phase candidate vectors  $CV_m(CR_{C-C}, Cph)$ , where the code rate ranges from  $CR_{C-C}=CR_{min}$  to  $CR_{C-C}=CR_{max}$ , the code phase ranges from  $Cph=0.0$  to  $Cph=0.9$ , and each vector has a length  $L_{CVm}$  of  $s_m$  samples (for example 5004). Hence, a particular code rate-phase candidate vector  $CV_m(CR_{C-C}, Cph)$  is given by a cuboid segment  $CV_m(CR_{min}+2\Delta CR, 0.4)$  which is parallel with the  $L_{CVm}$ -axis and ranges from  $L_{CVm}=s_1$  to  $L_{CVm}=s_m$ .

After having generated all the code rate-phase candidate vectors  $CV_m(CR_{C-C}, Cph)$ , these vectors are stored in a digital memory with a comparatively short access time, such that they may be readily accessed during the acquisition and/or tracking phase. Preferably, the code rate-phase candidate vectors  $CV_m(CR_{C-C}, Cph)$  are stored according to a data format which is adapted to correlation operations to be performed between a vector that has been derived from incoming data words and a segment of a the code rate-phase candidate vectors  $CV_m(CR_{C-C}, Cph)$ . For example, the code rate-phase candidate vectors  $CV_m(CR_{C-C}, Cph)$  may include packed samples or they may contain samples that are unpacked to a smallest manageable unit in the microprocessor, such as a byte. Further details regarding these data format issues will be discussed below with reference to figure 13.

During tracking of a spread spectrum signal, i.e. a continued reception of the signal and demodulation of the data contained therein, it is necessary to update relevant tracking parameters for the signal. Normally, the tracking phase is preceded by a so-called acquisition phase during which a set of preliminary parameters are established that are required for initiating the signal decoding. A successful acquisition phase thus results in that at least one signal source specific code sequence is identified and a data signal transmitted by means of this sequence is possible to demodulate. The tracking characteristics that may be associated with a signal source specific code sequence include: a modified code vector  $CV_m$  (which defines a

carrier frequency candidate vector  $f_{IF-C}$  and an initial phase position  $\Phi_C$ ), a code phase position,  $C_{ph}$ , and a code index,  $CI$ . In order to maintain an adequate timing of the correlating operations in the receiver, a set of pointers are required which  
5 indicate the start position of the code sequence in relation to the modified code vector and are updated repeatedly, preferably between each correlation.

Figure 11 illustrates one such set of pointers that are assigned to a modified code vector  $CV_m$ . A prompt pointer  $P_P$  indicates a  
10 current estimate of the code sequence start position. This pointer  $P_P$  is initially set equal to the code index  $CI$ . Adequate  $P_P$ -pointer positions for any subsequent segments of the received data are obtained by retrieving appropriate modified code vectors  $CV_m$  from the digital memory where such pre-generated are stored. Between each segment, the code rate  
15 candidate vector  $CR_{C-C}$  as well as the initial code phase  $C_{ph}$  is updated. Additionally, at least one pair of early- and late pointers  $P_E$  and  $P_L$  respectively is assigned on each side of the prompt pointer  $P_P$ , where the early pointer  $P_E$  specifies a sample value being positioned at least one element before the prompt  
20 pointer's  $P_P$  position, and the late pointer  $P_L$  specifies a sample value being positioned at least one element after the prompt pointer's  $P_P$  position. Each correlation is then performed with the presumption that the code sequence starts at the  $P_P$ -position, at the  $P_E$ -position as well as at the  $P_L$ -position. If the correlation  
25 over the  $P_P$ -position results in a higher correlation value than over any of the other positions, and at the same time the  $P_E$ - and  $P_L$ -pointers are balanced (i.e. the correlation over these positions result in equal values), this is interpreted as an optimal setting of the tracking parameters. Should, however, this not be  
30 true the sampled data must be repositioned in relation to the  $P_P$ -,  $P_E$ - and  $P_L$ -pointers, such that the correlation peak again coincides with the  $P_P$ -pointer's position. An un-calibrated pointer positioning may thus be detected via a difference between the  
35 correlation value over the  $P_E$ -pointer position and the correlation



value over the  $P_L$ -pointer position, while the correlation over the  $P_P$ -position still results in the highest correlation value. In this case, the potentially highest correlation value (corresponding to the optimal  $P_P$ -positioning) lies somewhere between the current  $P_P$ -position and the current  $P_E$ -position or between the current  $P_P$ -position and the current  $P_L$ -position depending on which of the  $P_E$ - and  $P_L$ -pointer positions that results in the highest correlation value. A pointer updating normally takes place between each segment. A second or third pair of  $P_E$ - and  $P_L$ -pointers outside the first pair of pointers further enhances the possibilities of accomplishing an accurate adjustment of the tracking. Depending on the value of the received symbol, an optimal setting  $P_P$ -pointer may, in fact, also be equivalent to the correlation over the  $P_P$ -position resulting in a lower correlation value than over any of the other pointer positions. Namely, this is true if a negative valued data bit is received. However otherwise, the same principles apply.

In any case, the  $P_P$ -,  $P_E$ - and  $P_L$ -pointers may only be positioned within certain intervals in the modified code vector  $CV_m$ . The  $P_P$ -pointer may be set anywhere within a first interval 111, the  $P_E$ -pointer within a second interval 112 and the  $P_L$ -pointer within a third interval 113. All the pointers are always set together, such that their relative distances remain unchanged. A limit value  $P_{L-min}$  for the  $P_L$ -pointer typically coincides with the first element of the modified code vector  $CV_m$ . Namely, outside this range a meaningful correlation cannot be performed. As a consequence of this and the fact that the pointers are set jointly  $P_P$ -,  $P_E$ - and  $P_L$ , a corresponding limit value  $P_{E-min}$  for the  $P_E$ -pointer is also defined.

Figure 12 illustrates how data words  $d(1)$ ,  $d(2)$ , ...,  $d(N)$  are formed from a sequence 1210 of incoming level-discrete sample values according to an embodiment of the invention. The data words  $d(1)$ , ...,  $d(N)$  are formed such that each data word  $d(k)$  contains a number of elements which is equal to the number of elements  $s_n$  in each carrier frequency-phase candidate vector. For instance, the length of these vectors may be 512 sample values

(as in the example described above with reference to the figures 5 and 6). Given that each sequence 1210 contains 5000 sample values, the number  $N$  of data words becomes 10 ( $5000/512 \approx 9.76$  means that the last quarter of the tenth data word  $d(10)$  is empty).

5 According to the invention, the elements in a current data word  $d(k)$  are processed jointly (i.e. in parallel). Then, the processing of a subsequent data word  $d(k+1)$  is initiated, and any processing parameters obtained during the processing of the current data word  $d(k)$  that are required when processing the subsequent data word  $d(k+1)$  are propagated as input data to the processing of the latter. These processing parameters preferably include: a pointer  $p_d$  which indicates a first sample value of the subsequent data word  $d(k+1)$ , a group of parameters which describe the relevant set of carrier frequency-phase candidate vectors  $V_{f\varphi}(f_{IF-C}, \varphi_C)$  (i.e. 15 a carrier frequency candidate vector  $f_{IF-C}$  representing an in-phase version and a carrier frequency candidate vector  $f_{IF-C}$  representing a quadrature-phase version), the relevant set of code vectors  $CV_m$ , and prompt-, early-, and late pointers  $P_P$ ,  $P_E$ , and  $P_L$  respectively.

20 Figure 13 illustrates how the data words of figure 12 are correlated with various pre-generated vectors according to an embodiment of the invention. First, a relevant set of carrier frequency-phase candidate vectors  $V_{f\varphi}(f_{IF-C}, \varphi_C)$  is calculated for the data word  $d(k)$ . This set is normally obtained in a preceding acquisition phase (or, if the data word  $d(k)$  is not the first word to be processed, during the processing of a previous word). 25

Thereafter, for each carrier frequency-phase candidate vector  $V_{f\varphi}(f_{IF-C}, \varphi_C)$  in the relevant set, a pre-generated in-phase representation  $f_{IF-I}$  and a quadrature-phase representation  $f_{IF-Q}$  of the vector ( $V_{f\varphi}(f_{IF-C}, \varphi_C)$ ) respectively is acquired. Both these representations are found in the digital memory where the pre-generated carrier frequency-phase candidate vectors  $V_{f\varphi}(f_{IF-C}, \varphi_C)$  are stored because they are merely one quarter period delays of one and the same vector, and the memory holds initial phase position representations for an entire period, see figure 6. 30 35

Then, in order to eliminate the influence of the carrier frequency component, the data word  $d(k)$  is multiplied with the in-phase representation  $f_{IF-I}$  of the carrier frequency-phase candidate vector  $V_{f\phi}(f_{IF-C}, \phi_C)$  in the relevant set. As a result thereof, a first intermediate-frequency-reduced information word  $S_{IF-I}(k)$  is produced. Correspondingly, the data word  $d(k)$  is also multiplied with the quadrature-phase representation  $f_{IF-Q}$  of the carrier frequency-phase candidate vector  $V_{f\phi}(f_{IF-C}, \phi_C)$  in the relevant set, and a second intermediate-frequency-reduced information word  $S_{IF-Q}(k)$  is produced.

Preferably, the multiplication between the data word  $d(k)$  and the in-phase representation  $f_{IF-I}$  respective the quadrature-phase representation  $f_{IF-Q}$  of the carrier frequency-phase candidate vector  $V_{f\phi}(f_{IF-C}, \phi_C)$  are performed by means of XOR- or SIMD-operations (i.e. 1-bit and multiple-bits multiplications respectively). This is namely possible if the data word  $d(k)$  and the vector  $V_{f\phi}(f_{IF-C}, \phi_C)$  have compatible data formats.

Subsequently, the first intermediate-frequency-reduced information word  $S_{IF-I}(k)$  is multiplied with a modified code vector  $CV_{m-P}$ , which has been retrieved from the digital memory where these pre-generated vectors are stored, and starts at a position indicated by the prompt pointer  $P_P$ . A first prompt-despread symbol string  $\Lambda_{IP}(k)$  is produced as a result of this operation. The first intermediate-frequency-reduced information word  $S_{IF-I}(k)$  is also multiplied with a modified code vector  $CV_{m-E}(k)$ , which starts at a position indicated by the early pointer  $P_E$ . A first early-despread symbol string  $\Lambda_{IE}(k)$  is produced as a result of this operation. The first intermediate-frequency-reduced information word  $S_{IF-I}(k)$  is likewise multiplied with a modified code vector  $CV_{m-L}(k)$ , which starts at a position indicated by the late pointer  $P_L$ , and a first late-despread symbol string  $\Lambda_{IL}(k)$  is produced. Moreover, the second intermediate-frequency-reduced information word  $S_{IF-Q}(k)$  is multiplied with a modified code vector  $CV_{m-P}(k)$ , which starts at a position indicated by the prompt pointer  $P_P$ , and a second prompt-despread symbol string

$\Lambda_{QP}(k)$  is produced. Correspondingly, the second intermediate-frequency-reduced information word  $S_{IF-Q}(k)$  is multiplied with a modified code vector  $CV_{m-E}(k)$ , which starts at a position indicated by the early pointer  $P_E$ , and a second early-despread symbol string  $\Lambda_{QE}(k)$  is produced. Likewise, the second intermediate-frequency-reduced information word  $S_{IF-Q}(k)$  is multiplied with a modified code vector  $CV_{m-L}(k)$ , which starts at a position indicated by the late pointer  $P_L$ , and a second late-despread symbol string  $\Lambda_{QL}(k)$  is produced.

After that, a resulting data word  $D_{R-IE}(k)$ ,  $D_{R-IP}(k)$ ,  $D_{R-IL}(k)$ ,  $D_{R-QE}(k)$ ,  $D_{R-QP}(k)$  and  $D_{R-QL}(k)$  may be derived from each of the despread symbol strings  $\Lambda_{IP}(k)$ ,  $\Lambda_{IE}(k)$ ,  $\Lambda_{IL}(k)$ ,  $\Lambda_{QP}(k)$ ,  $\Lambda_{QE}(k)$  and  $\Lambda_{QL}(k)$  respectively by adding the elements in the respective string together. If the strings represent un-packed data, the processor may simply perform the relevant adding operation to obtain the resulting data word  $D_R(k)$ . If however, the strings represent packed data, the resulting data word  $D_R(k)$  is, according to a preferred embodiment of the invention, derived by looking up a pre-generated value in a table 1310 based on the bit pattern given by the respective despread symbol string  $\Lambda_{IP}(k)$ ,  $\Lambda_{IE}(k)$ ,  $\Lambda_{IL}(k)$ ,  $\Lambda_{QP}(k)$ ,  $\Lambda_{QE}(k)$  and  $\Lambda_{QL}(k)$ .

According to a preferred embodiment of the invention, in addition to the individual data words  $D_{R-IE}(k)$ ,  $D_{R-IP}(k)$ ,  $D_{R-IL}(k)$ ,  $D_{R-QE}(k)$ ,  $D_{R-QP}(k)$  and  $D_{R-QL}(k)$ , corresponding accumulated data words are produced, such that after having generated a data word  $D_R(k)$ , the sum of all data words  $D_R(1)$  to  $D_R(k)$  is also obtained. Hence, when the data word  $d(N)$  has been processed, the resulting sum  $D_R(1)$  to  $D_R(N)$  is also at hand.

Moreover, the resulting data words represent payload information. For instance, based on the set of resulting data words  $D_{R-IE}(k)$ ,  $D_{R-IP}(k)$ ,  $D_{R-IL}(k)$ ,  $D_{R-QE}(k)$ ,  $D_{R-QP}(k)$  and  $D_{R-QL}(k)$  a demodulated piece of information of a transmitted data symbol sequence  $D$  as shown in figure 4 may be derived. In a steady state operation, basically only one of the resulting data words, say  $D_{R-IP}(k)$ ,

actually carries the information.

- According to a preferred embodiment of the invention, the multiplications involved in the multiplications between the intermediate-frequency-reduced information words  $S_{IF-I}(k)$  and  $S_{IF-Q}(k)$  respectively and the modified code vectors  $CV_{m-P}(k)$ ,  $CV_{m-E}(k)$ ;  $CV_{m-L}(k)$  are all performed by means of XOR- or SIMD-operations. This is possible if the intermediate frequency information words  $S_{IF-I}(k)$ ;  $S_{IF-Q}(k)$  and the modified code vectors  $CV_{m-E}(k)$ ,  $CV_{m-P}(k)$ ;  $CV_{m-L}(k)$  have compatible data formats.
- 10 It was mentioned above with reference to figure 11 that more than one pair of early- and late pointers may be assigned to the prompt pointer in order to accomplish an improved tracking. Figure 14 illustrates how two pairs of such pointers  $P_{E1}$ ;  $P_{L1}$  and  $P_{E2}$ ;  $P_{L2}$  respectively are assigned around a prompt pointer  $P_P$
- 15 according to an embodiment of the invention. The horizontal axis here represents a code shift CS and the vertical axis shows a normalised correlation factor. An optimal positioning of the prompt pointer  $P_P$  is thus equivalent to a normalised correlation value of 1. The more the sampled data is shifted in either
- 20 direction from this position, the lower the correlation value becomes down to substantially zero for a shift of one chip or more. The algorithm is perfectly balanced when (as illustrated in the figure) both the pointers  $P_{E1}$  and  $P_{L1}$  of a first pair produce a first shifted correlation result, both the pointers  $P_{E2}$  and  $P_{L2}$  of a
- 25 second pair produce a second shifted correlation result, the first shifted correlation result is larger than the second shifted correlation result and both the first and the second shifted correlation results are smaller than the correlation result obtained at the prompt position  $P_P$ . Said correlation results are preferably
- 30 generated according to a process corresponding to what has been described above with reference to figure 13. Based on the correlation results for the pointer positions  $P_P$ ,  $P_{E1}$ ,  $P_{L1}$ ,  $P_{E2}$  and  $P_{L2}$  a (if necessary new) set of modified code vectors  $CV_{m-E}(k)$ ,  $CV_{m-P}(k)$ ;  $CV_{m-L}(k)$  is selected, which is deemed to be optimal.

Figure 15 shows a signal receiver 1500 for receiving navigation data signals transmitted in a navigation satellite system according to an embodiment of the invention. The receiver 1500 includes radio front end unit 1510, an interface unit 1520 and a digital processor unit 1530.

The radio front end unit 1510 is adapted to receive a continuous radio signal  $S_{HF}$ , and in response thereto produce a corresponding electrical signal  $S_{IF}$  which has a comparatively high frequency. The interface unit 1520 is adapted to receive the electrical signal  $S_{IF}$ , and in response thereto, produce a sequence of sample values that represents the same information as the electrical signal  $S_{IF}$  and is divided into data words  $d(k)$ . The digital processor unit 1530 is adapted to receive the data words  $d(k)$ , and in response thereto, demodulate a data signal. The digital processor unit 1530, in turn, includes a memory means 1535, which is loaded with a computer program that is capable of controlling the steps of the proposed procedure when the program is run in the processor unit 1530.

In order to sum up, the general method of processing spread spectrum signals according to the invention will now be described with reference to a flow diagram in figure 16.

A preparation step 1600 pre-generates code vectors which each represents a signal source specific code sequence that is intended to be received (or at least possible to receive) and demodulated in the receiver. The step 1600 is performed before the signal reception is initiated.

A step 1610 then receives a continuous signal of a comparatively high frequency. A following step 1620 samples the continuous signal at a basic sampling rate, whereby a resulting sequence of time discrete signal samples is produced. Each sample is also quantised (either with a relatively low-resolution, such as with 1 bit per sample value, or with a relatively high resolution depending on the application and the number of data

bits per samples delivered from the radio front end unit 1510), such that a corresponding level-discrete sample value is obtained. Subsequently, a step 1630 forms data words from the sample values, where each data word includes one or more  
5 consecutive sample values. After that, a step 1640 carries out correlation operations between the information in the data words and at least one of the pre-generated representations of a signal source specific code sequence. The correlation step involves correlating at least each vector in a sub-group of the code  
10 vectors with at least one vector that has been derived from a data word. A following step 1650 produces data as a result of the correlation performed in step 1640. Then, a step 1660 investigates whether the sampled sequence has ended, i.e. whether there are any more data words to process. If more  
15 sampled data to process is found, the procedure returns to the step 1640. Otherwise, the procedure loops back to the step 1610 again for continued reception of the incoming signal. Naturally, such signal is preferably also received during execution of the steps 1620 to 1660. The sequential procedure  
20 illustrated in figure 16 is merely applicable to a specific received signal segment. Preferably, all the steps are actually 1610 to 1660 are actually performed in parallel.

The process steps, as well as any sub-sequence of steps, described with reference to the figure 16 above may be  
25 controlled by means of a programmed computer apparatus, such as a microprocessor located in a GNSS-receiver. Moreover, although the embodiments of the invention described above with reference to the drawings comprise computer apparatus and processes performed in computer apparatus, the invention thus  
30 also extends to computer programs, particularly computer programs on or in a carrier, adapted for putting the invention into practice. The program may be in the form of source code, object code, a code intermediate source and object code such as in partially compiled form, or in any other form suitable for  
35 use in the implementation of the process according to the

- invention. The carrier may be any entity or device capable of carrying the program. For example, the carrier may comprise a storage medium, such as a ROM (Read Only Memory), for example a CD (Compact Disc) or a semiconductor ROM, or a magnetic recording medium, for example a floppy disc or hard disc. Further, the carrier may be a transmissible carrier such as an electrical or optical signal which may be conveyed via electrical or optical cable or by radio or by other means. When the program is embodied in a signal which may be conveyed directly by a cable or other device or means, the carrier may be constituted by such cable or device or means. Alternatively, the carrier may be an integrated circuit in which the program is embedded, the integrated circuit being adapted for performing, or for use in the performance of, the relevant processes.
- 15 The term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components. However, the term does not preclude the presence or addition of one or more additional features, integers, steps or components or groups thereof.
- 20 The invention is not restricted to the described embodiments in the figures, but may be varied freely within the scope of the claims.



### Claims

1. A method of processing spread spectrum signals comprising:  
receiving a continuous signal ( $S_{IF}$ ) of a comparatively high  
5 frequency,  
sampling the continuous signal ( $S_{IF}$ ) at a basic sampling rate ( $r_s$ ), whereby a resulting sequence of time discrete signal samples ( $S[s_i]$ ) is produced,  
quantising each signal sample into a corresponding level-  
10 discrete sample value,  
forming of a plurality of data words ( $d(1), \dots, d(N)$ ) which each includes one or more consecutive sample values ( $s_1, \dots, s_n$ ), and  
correlation between information in the data words ( $d(k)$ ) and  
15 at least one representation ( $CS(i)$ ) of a signal source specific code sequence ( $CS$ ), characterized by  
the method comprising a preparation for the correlation step, wherein, before receiving the continuous signal ( $S_{IF}$ ), a multitude of code vectors ( $CV; CV_m$ ) are pre-generated, each code vector  
20 representing a particular code sequence ( $CS(i)$ ) of the at least one signal source specific code sequence ( $CS$ ), and  
the correlation step involving multiplying at least each vector in a sub-group ( $CV_{m-E}, CV_{m-P}, CV_{m-L}$ ) of the code vectors ( $CV; CV_m$ ) with at least one vector ( $S_{IF-I}(k); S_{IF-Q}(k)$ ) derived from the  
25 data word ( $d(k)$ ).
2. A method according to claim 1, characterized by each code vector ( $CV; CV_m$ ) representing a particular signal source specific code sequence ( $CS(i)$ ) being sampled at the basic sampling rate ( $r_s$ ) and quantised with the quantising process being  
30 used to produce the level-discrete sample values ( $s_1, \dots, s_n$ ).
3. A method according to any one of the preceding claims, characterized by the at least one signal source specific code sequence ( $CS$ ) being pseudo random noise.

4. A method according to any one of the preceding claims, characterized by the receiving step involving down conversion of an incoming high-frequency signal ( $S_{HF}$ ) to an intermediate frequency signal ( $S_{IF}$ ), the high-frequency signal ( $S_{HF}$ ) having a spectrum which is symmetric around a first frequency ( $f_{HF}$ ) and the intermediate frequency signal ( $S_{IF}$ ) having a spectrum which is symmetric around a second frequency ( $f_{IF}$ ) being considerably lower than the first frequency ( $f_{HF}$ ).
5. A method according to claim 4, characterized by the steps of: determining a maximum frequency variation ( $f_D$ ) of the second frequency ( $f_{IF}$ ) due to Doppler-effects, defining a Doppler frequency interval ( $f_{IF-min} - f_{IF-max}$ ) around the second frequency ( $f_{IF}$ ), the Doppler frequency interval ( $f_{IF-min} - f_{IF-max}$ ) having a lowest frequency limit ( $f_{IF-min}$ ) equal to the difference between the second frequency ( $f_{IF}$ ) and the maximum frequency variation ( $f_D$ ), and a highest frequency limit ( $f_{IF-max}$ ) equal to the sum of the second frequency ( $f_{IF}$ ) and the maximum frequency variation ( $f_D$ ), dividing the Doppler frequency interval ( $f_{IF-min} - f_{IF-max}$ ) into an integer number of equidistant ( $\Delta f$ ) frequency steps ( $f_{IF-min}$ ,  $f_{IF-min} + \Delta f$ , ...,  $f_{IF-max}$ ), and defining a frequency candidate vector ( $f_{IF-C}$ ) for each frequency step ( $f_{IF-min}$ ,  $f_{IF-min} + \Delta f$ , ...,  $f_{IF-max}$ ).
6. A method according to claim 5, characterized by the steps of: determining an integer number of initial phase positions ( $\varphi_0, \dots, \varphi_7$ ) for the intermediate frequency signal ( $S_{IF}$ ), and defining a carrier frequency-phase candidate vector ( $V_{f\varphi}(f_{IF-C}, \varphi_C)$ ) for each combination of carrier frequency candidate vector ( $f_{IF-C}$ ) and initial phase position ( $\varphi_0, \dots, \varphi_7$ ).
7. A method according to claim 6, characterized by the steps of: determining the number of elements ( $s_n$ ) in each carrier frequency-phase candidate vector ( $V_{f\varphi}(f_{IF-C}, \varphi_C)$ ), and

storing the carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) according to a data format being adapted to performing correlation operations between the at least one vector ( $S_{IF-I}(k); S_{IF-Q}(k)$ ) derived from the data word ( $d(k)$ ) and a  
 5 segment of a carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ).

8. A method according to claim 7, characterized by the adapting of the data format involving adding at least one element to each segment of the carrier frequency-phase candidate  
 10 vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) such that the segment attains a number of elements which is equal to the number of elements in each the at least one vector ( $S_{IF-I}(k); S_{IF-Q}(k)$ ) derived from the data word ( $d(k)$ ), thus enabling a segment of the carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) and one of the at least one  
 15 vector ( $S_{IF-I}(k); S_{IF-Q}(k)$ ) to be processed jointly by at least one of a SIMD-operation and an XOR-operation.

9. A method according to any one of the preceding claims, characterized by the steps of:

determining a maximum variation a code rate due to  
 20 Doppler-effects,

defining a Doppler rate interval ( $CR_{C-min} - CR_{C-max}$ ) around a center code rate ( $CR_C$ ), the Doppler frequency interval having a lowest code rate limit ( $CR_{C-min}$ ) equal to the difference between the center code rate ( $CR_C$ ) and the maximum code rate variation ( $CR_D$ ), and a highest frequency limit ( $CR_{C-max}$ ) equal to  
 25 the sum of the center code rate ( $CR_C$ ) and the maximum code rate variation ( $CR_D$ ),

dividing the Doppler rate interval ( $CR_{C-min} - CR_{C-max}$ ) into an integer number of equidistant ( $\Delta CR$ ) code rate steps ( $CR_{C-min}$ ,  
 30  $CR_{C-min} + \Delta CR, \dots, CR_{C-max}$ ) and

defining a code rate candidate ( $CR_{C-C}$ ) for each code rate step ( $CR_{C-min}, CR_{C-min} + \Delta CR, \dots, CR_{C-max}$ ).

10. A method according to claim 9, characterized by determining an integer number of possible initial code phase positions (0.0, ..., 0.9) for each code rate candidate ( $CR_{C-C}$ ).

5 11. A method according to claim 10, characterized by defining, for each signal source specific code sequence ( $CS(i)$ ), a set of combinations between code rate candidate ( $CR_{C-C}$ ) and code phase position (0.0, ..., 0.9), each combination representing a code rate-phase candidate vector.

10 12. A method according to claim 11, characterized by generating, for each signal source specific code sequence ( $CS(i)$ ), a set of code vectors ( $CV$ ) by:

sampling each code rate-phase candidate vector with the basic sampling rate ( $r_s$ ) whereby a corresponding code vector ( $CV$ ) is produced.

15 13. A method according to any one of the preceding claims, characterized by generating a modified code vector ( $CV_m$ ) on basis of each code vector ( $CV$ ) by:

20 copying a particular number of elements ( $E_a$ ) from the end of an original code vector ( $CV$ ) to the beginning of the modified code vector ( $CV_m$ ), and

copying the particular number of elements ( $E_b$ ) from the beginning of the original code vector ( $CV$ ) to the end of the code vector ( $CV_m$ ).

25 14. A method according to claim 13, characterized by storing, for each signal source specific code sequence ( $CS(i)$ ), a set of modified code vectors ( $\{CV_m(CR_{C-C}, Cph)\}$ ), where

each modified code vector ( $CV_m$ ) contains a number of elements ( $s_1, \dots, s_m$ ) representing a sampled version of at least one full code sequence ( $CS$ ),

30 a particular modified code vector ( $CV_m$ ) is defined for each combination of code rate candidate ( $CR_{C-C}$ ) and code phase

position (Cph).

15. A method according to claim 14, characterized by adapting the data format of the modified code vectors ( $CV_m$ ) with respect to the data format of the at least one vector ( $S_{IF-I}(k)$ ;  $S_{IF-Q}(k)$ ) derived from the data word ( $d(k)$ ), such that a modified code vector ( $CV_m$ ) and one of the at least one vector ( $S_{IF-I}(k)$ ;  $S_{IF-Q}(k)$ ) may be processed jointly by at least one of a SIMD-operation and an XOR-operation.
16. A method according to any one of the claims 14 or 15, characterized by involving an initial acquisition phase and a subsequent tracking phase, wherein during the acquisition phase a set of preliminary parameters are established which are required for initiating a decoding of signals received during the tracking phase, a successful acquisition phase resulting in at least one signal source specific code sequence (CS) being identified and a transmitted signal being rendered possible to track, each of the at least one signal source specific code sequence (CS) being associated with tracking characteristics in the form of:
  - a modified code vector ( $CV_m$ ),
  - a carrier frequency candidate vector ( $f_{IF-C}$ ),
  - an initial phase position ( $\Phi_C$ ),
  - a code phase position (Cph), and
  - a code index (CI) denoting a starting sample value for the modified code vector ( $CV_m$ ).
17. A method according to claim 16, characterized by the tracking involving:
  - calculating, based the tracking characteristics, a prompt pointer ( $P_P$ ) for each modified code vector ( $CV_m$ ), the prompt pointer ( $P_P$ ) indicating a code sequence start position, and an initial prompt pointer ( $P_P$ ) being equal to the code index (CI), and
  - assigning, around each prompt pointer ( $P_P$ ), at least one pair of early- and late pointers ( $P_E, P_L$ ;  $P_{E1}, P_{L1}$   $P_{E2}, P_{L2}$ ), where

the early pointer ( $P_E$ ) specifies a sample value being positioned at least one element before the prompt pointer's ( $P_P$ ) position, and the late pointer ( $P_L$ ) specifies a sample value being positioned at least one element after the prompt pointer's ( $P_P$ ) position.

18. A method according to claim 17, characterized by the tracking involving:  
receiving a sequence of incoming level-discrete sample values (1210),

10. forming data words ( $d(1), \dots, d(N)$ ) of the sample values (1210) such that each data word ( $d(k)$ ) contains a number of elements which is equal to the number of elements ( $s_n$ ) in each carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ),

15. calculating a relevant set of carrier frequency-phase candidate vectors ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) for the data word ( $d(k)$ ), and  
acquiring, for each carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) in the relevant set, a pre-generated in-phase representation ( $f_{IFI}$ ) and a quadrature-phase representation ( $f_{IFQ}$ ) of the vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) respectively.

20. 19. A method according to claim 18, characterized by the tracking involving:

25. multiplying each data word ( $d(k)$ ) with the in-phase representation ( $f_{IFI}$ ) of the carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) in the relevant set to produce a first intermediate-frequency-reduced information word ( $S_{IF-I}(k)$ ),

multiplying each data word ( $d(k)$ ) with the quadrature-phase representation ( $f_{IFQ}$ ) of the carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) in the relevant set to produce a second intermediate-frequency-reduced information word ( $S_{IF-Q}(k)$ ).

30. 20. A method according to claim 19, characterized by the tracking involving:

multiplying the first intermediate-frequency-reduced infor-

mation word ( $S_{IF-I}(k)$ ) with a modified code vector ( $CV_{m-P}(k)$ ) starting at a position indicated by the prompt pointer ( $P_P$ ) to produce a first prompt-despread symbol string ( $\Lambda_{IP}(k)$ ),

- 5 multiplying the first intermediate-frequency-reduced information word ( $S_{IF-I}(k)$ ) with a modified code vector ( $CV_{m-E}(k)$ ) starting at a position indicated by an early pointer ( $P_E$ ) to produce a first early-despread symbol string ( $\Lambda_{IE}(k)$ ),

- 10 multiplying the first intermediate-frequency-reduced information word ( $S_{IF-I}(k)$ ) with a modified code vector ( $CV_{m-L}(k)$ ) starting at a position indicated by a late pointer ( $P_L$ ) to produce a first late-despread symbol string ( $\Lambda_{IL}(k)$ ),

- 15 multiplying the second intermediate-frequency-reduced information word ( $S_{IF-Q}(k)$ ) with a modified code vector ( $CV_{m-P}(k)$ ) starting at a position indicated by the prompt pointer ( $P_P$ ) to produce a second prompt-despread symbol string ( $\Lambda_{QP}(k)$ ),

- 20 multiplying the second intermediate-frequency-reduced information word ( $S_{IF-Q}(k)$ ) with a modified code vector ( $CV_{m-E}(k)$ ) starting at a position indicated by the early pointer ( $P_E$ ) to produce a second early-despread symbol string ( $\Lambda_{QE}(k)$ ), and

- 25 multiplying the second intermediate-frequency-reduced information word ( $S_{IF-Q}(k)$ ) with a modified code vector ( $CV_{m-L}(k)$ ) starting at a position indicated by the late pointer ( $P_L$ ) to produce a second late-despread symbol string ( $\Lambda_{QL}(k)$ ).

21. A method according to claim 20, characterized by the tracking involving deriving, for each despread symbol string, a resulting data word ( $D_{R-IP}(k)$ ,  $D_{R-IE}(k)$ ,  $D_{R-IL}(k)$ ,  $D_{R-QP}(k)$ ,  $D_{R-QE}(k)$ ;  $D_{R-QL}(k)$ ).

22. A method according to claim 21, characterized by deriving the resulting data words ( $D_{R-IP}(k)$ ,  $D_{R-IE}(k)$ ,  $D_{R-IL}(k)$ ,  $D_{R-QP}(k)$ ,  $D_{R-QE}(k)$ ;  $D_{R-QL}(k)$ ) by looking up a respective pre-generated value in a table (1310).

23. A method according to any one of the claims 19 - 22, characterized by performing the multiplication between the data word ( $d(k)$ ) and the in-phase representation ( $f_{IF-I}$ ) of the carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) respective  
 5 between the data word ( $d(k)$ ) and the a quadrature-phase representation ( $f_{IF-Q}$ ) of the carrier frequency-phase candidate vector ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ) by means of at least one of a SIMD-operation and an XOR-operation

24. A method according to any one of the claims 19 - 23,  
 10 characterized by performing the multiplication between the intermediate-frequency-reduced information words ( $S_{IF-I}(k)$ ;  $S_{IF-Q}(k)$ ) and the modified code vectors ( $CV_{m-P}$ ,  $CV_{m-E}$ ;  $CV_{m-L}$ ) by means of at least one of a SIMD-operation and an XOR-operation.

25. A method according to any one of the claims 19 - 24,  
 15 characterized by propagating, in connection with completing the processing of a current data word ( $d(k)$ ) and initiating the processing of a subsequent data word ( $d(k+1)$ ):

- a pointer ( $p_d$ ) indicating a first sample value of the subsequent data word ( $d(k+1)$ ),
- 20 a group of parameters describing the relevant set of carrier frequency-phase candidate vectors ( $V_{f\phi}(f_{IF-C}, \phi_C)$ ),
- the relevant set of code vectors ( $CV_m$ ), and
- prompt-, early-, and late pointers ( $P_P$ ,  $P_E$ ,  $P_L$ ).

26. A computer program directly loadable into the internal  
 25 memory of a computer, comprising software for controlling the steps of any of the claims 1 - 25 when said program is run on the computer.

27. A computer readable medium, having a program recorded thereon, where the program is to make a computer control the  
 30 steps of any of the claims 1 - 25.



28. A signal receiver (1500) for receiving navigation data signals transmitted in a navigation satellite system comprising:

5 a radio front end unit (1510) adapted to receive a continuous radio signal ( $S_{HF}$ ) and in response thereto produce a corresponding electrical signal ( $S_{IF}$ ) comparatively high frequency,

an interface unit (1520) adapted to receive the electrical signal ( $S_{IF}$ ) and in response thereto produce a sequence of sample values being divided into data words ( $d(k)$ ), and

10 a digital processor unit (1530) adapted to receive the data words ( $d(k)$ ) and in response thereto demodulate a data signal, and including a memory means (1535), characterized in that a computer program according to claim 26 is loaded into the memory means (1535).






15

**Abstract**

The present invention relates to processing of spread spectrum signals, where a continuous signal of a comparatively high frequency is received (1610). This signal is sampled at a basic  
5 sampling rate whereby a resulting sequence of time discrete signal samples is produced, which are in turn quantised into a corresponding level-discrete sample value (1620). A plurality of data words are formed, which each includes one or more consecutive sample values (1630). Information obtained from  
10 these data words is correlated (1640) with at least one representation of a signal source specific code sequence, which has been pre-generated in the form of a code vector (1600). The correlation step specifically involves correlating at least each vector in a sub-group of the code vectors with at least one  
15 vector that has been derived from the data word. Thereby resulting data is produced (1650).

(Fig. 16)

9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186

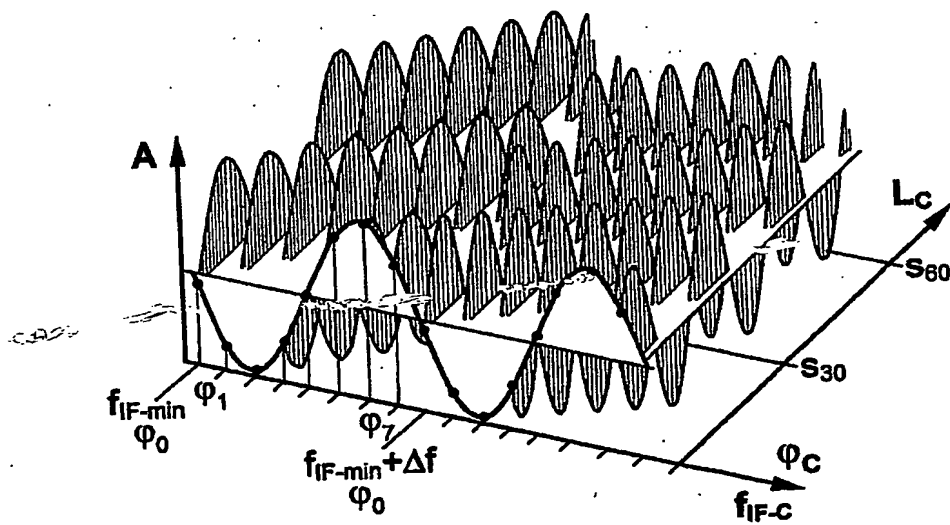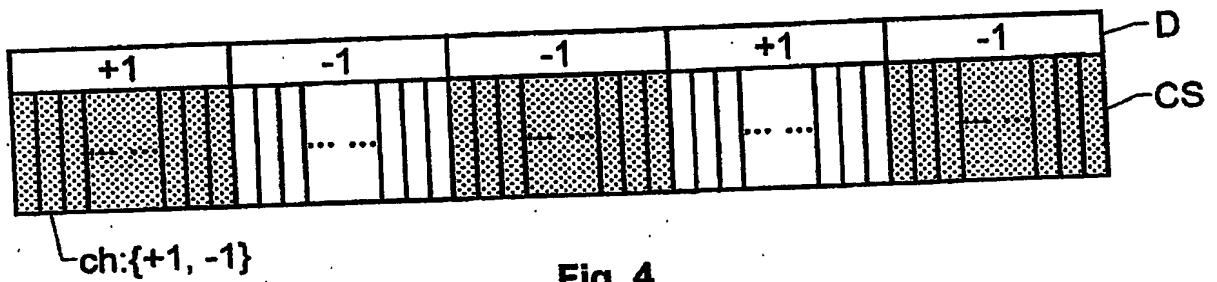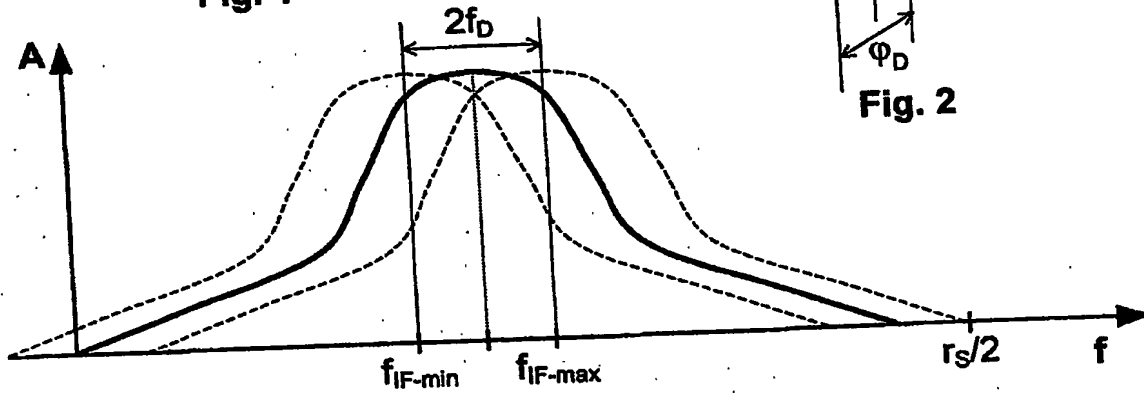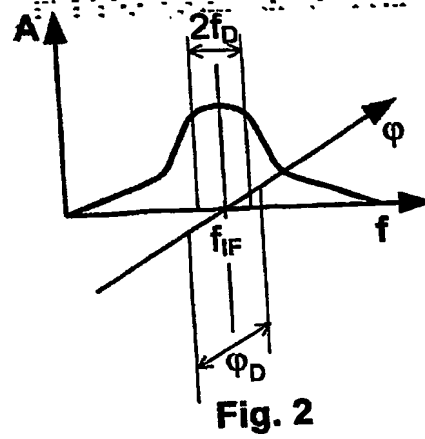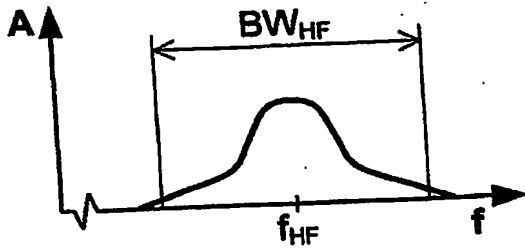

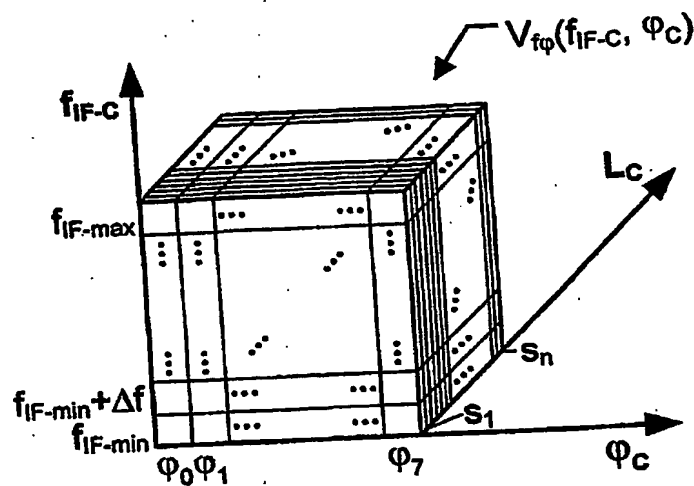


Fig. 6

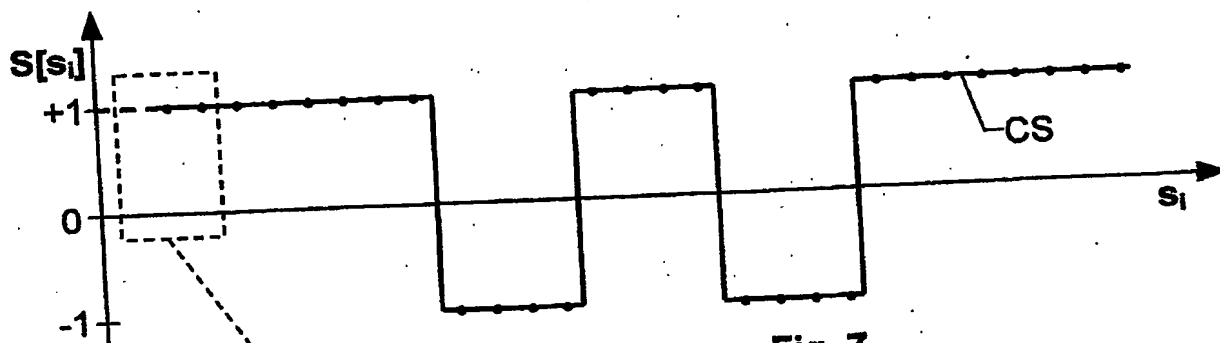


Fig. 7

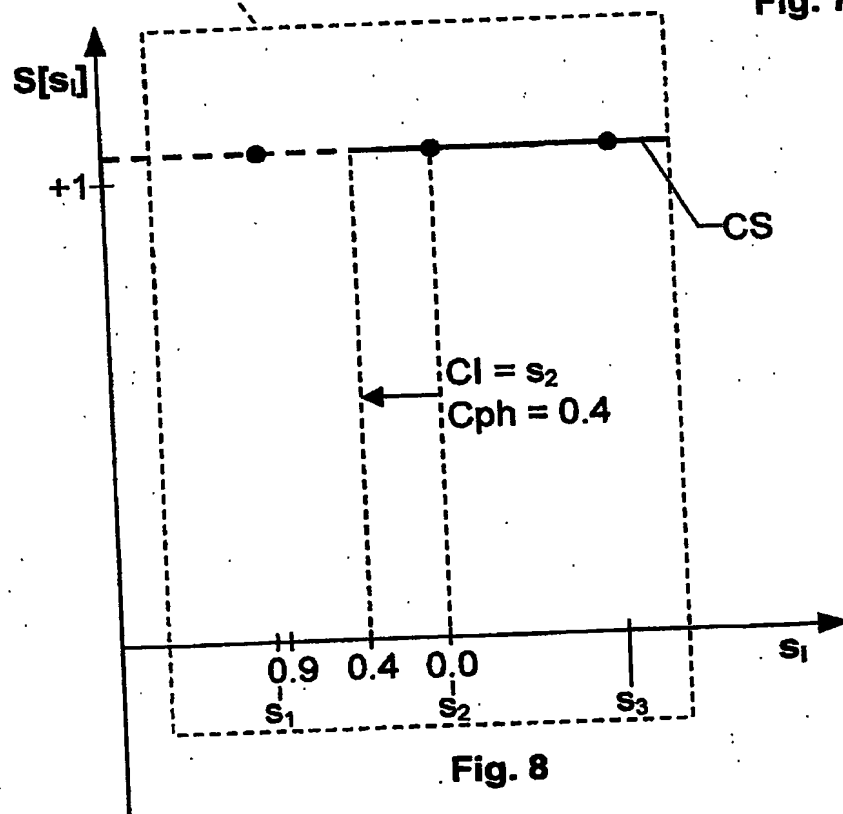
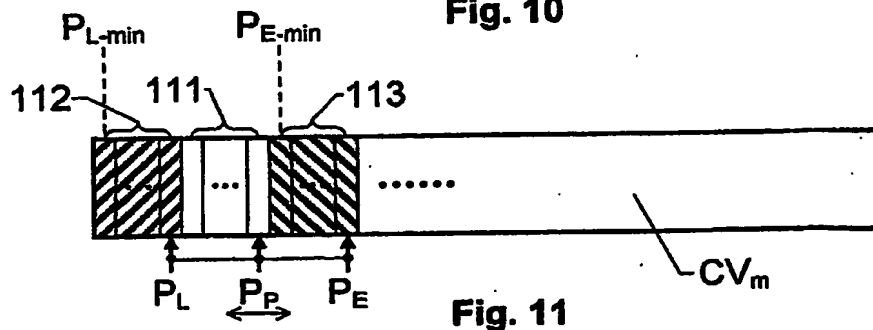
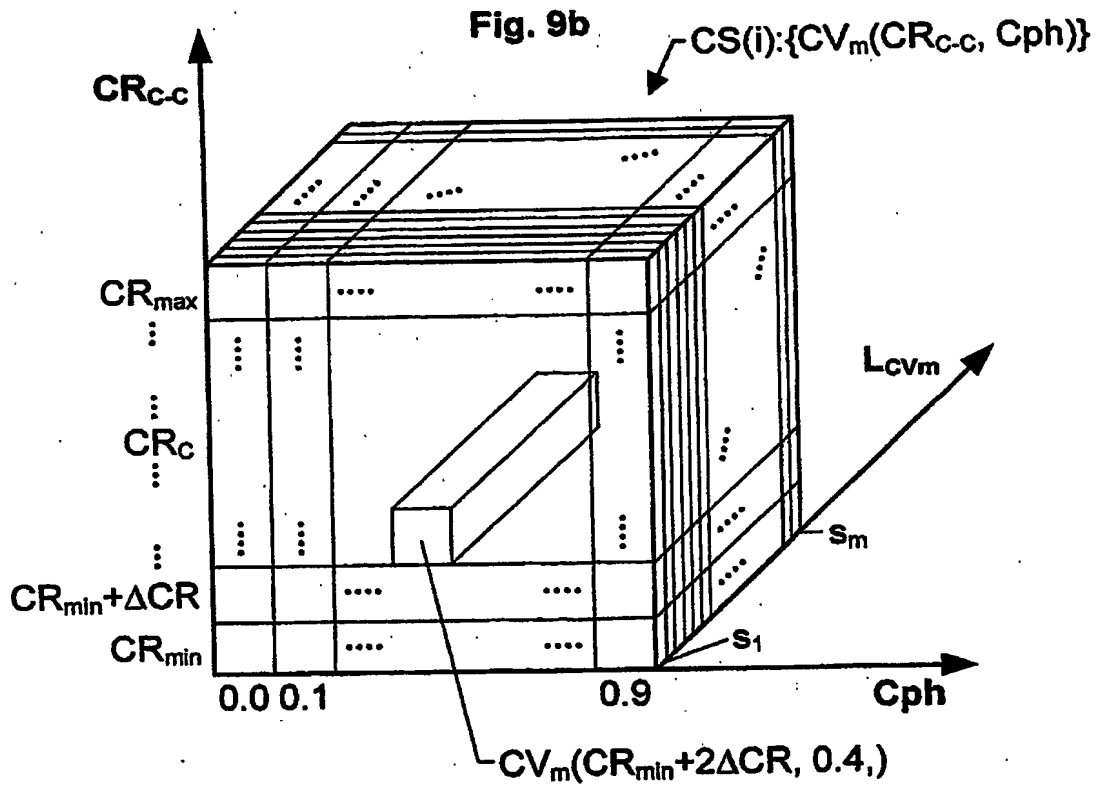
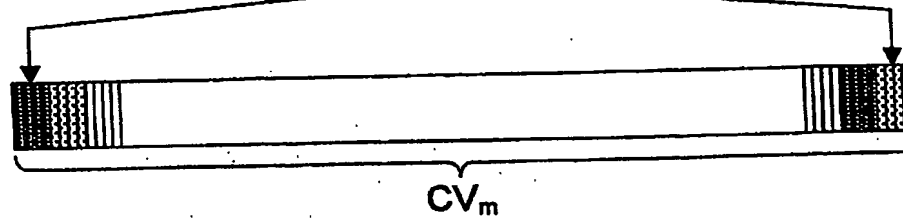
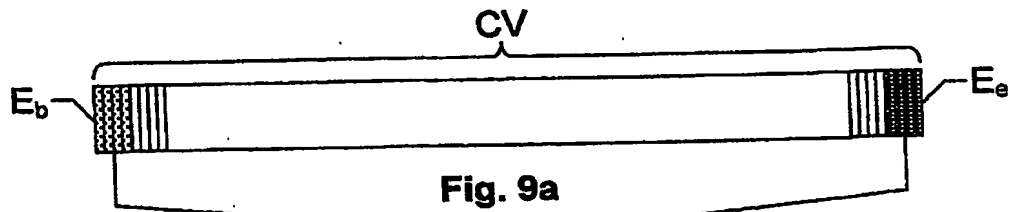


Fig. 8



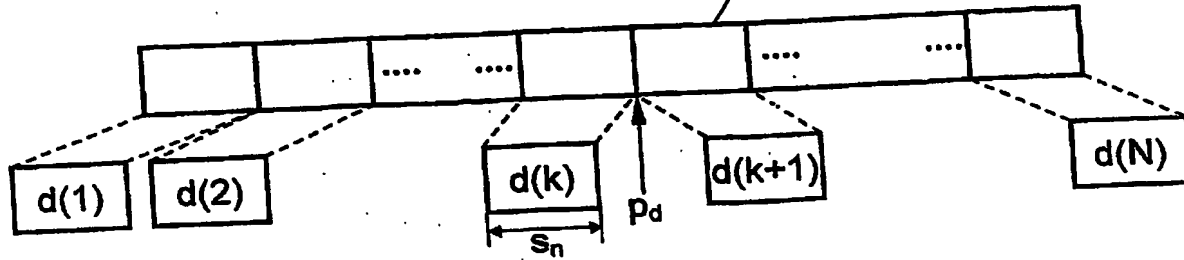


Fig. 12

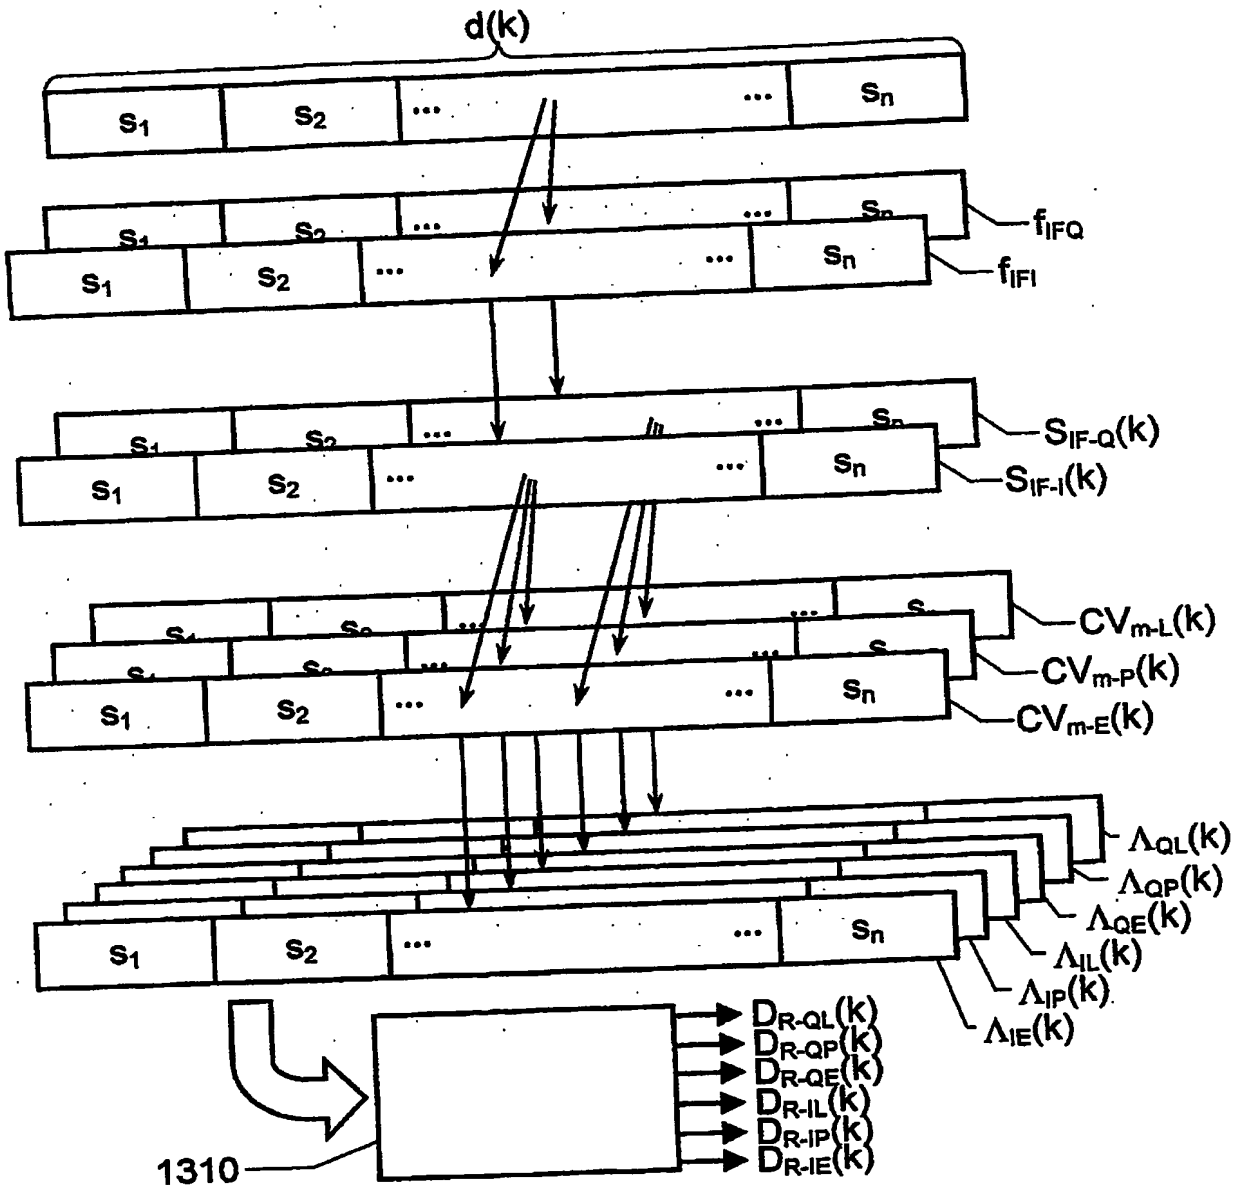


Fig. 13

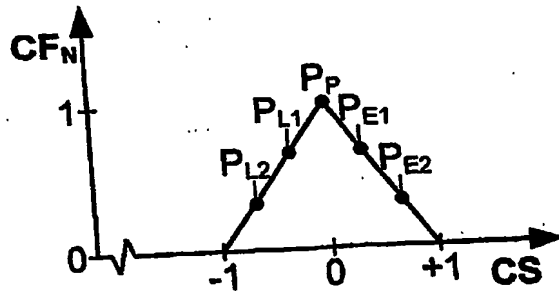


Fig. 14

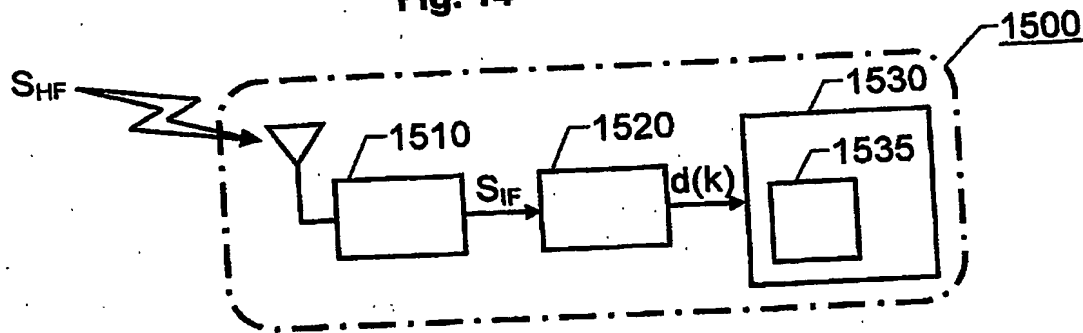


Fig. 15

